

SHIFFYY

FLEET




US-T500

US-T500 is an advanced GPS tracker for cars and light commercial vehicles. It is designed for vehicle tracking and can perform advanced tasks – read on-board computer data (CAN), read manufacturer specific OBD data, monitor driver behavior, manage fuel, etc.

The device is available in variations that use GSM (2G), UMTS (3G) and LTE Cat M1/NB-IoT (4G) networks and Bluetooth for communication. The NB-IoT network is included into the LTE Cat M1 variation.

Applications

- Advanced OBD and CAN reading
- Applicable to business and private trips
- Driver behavior monitoring
- Safety and security
- Car sharing
- Fuel monitoring
- Real-time monitoring of fleets
- Fleet efficiency optimization
- Customizable with accessories
- Accident reconstruction data recording

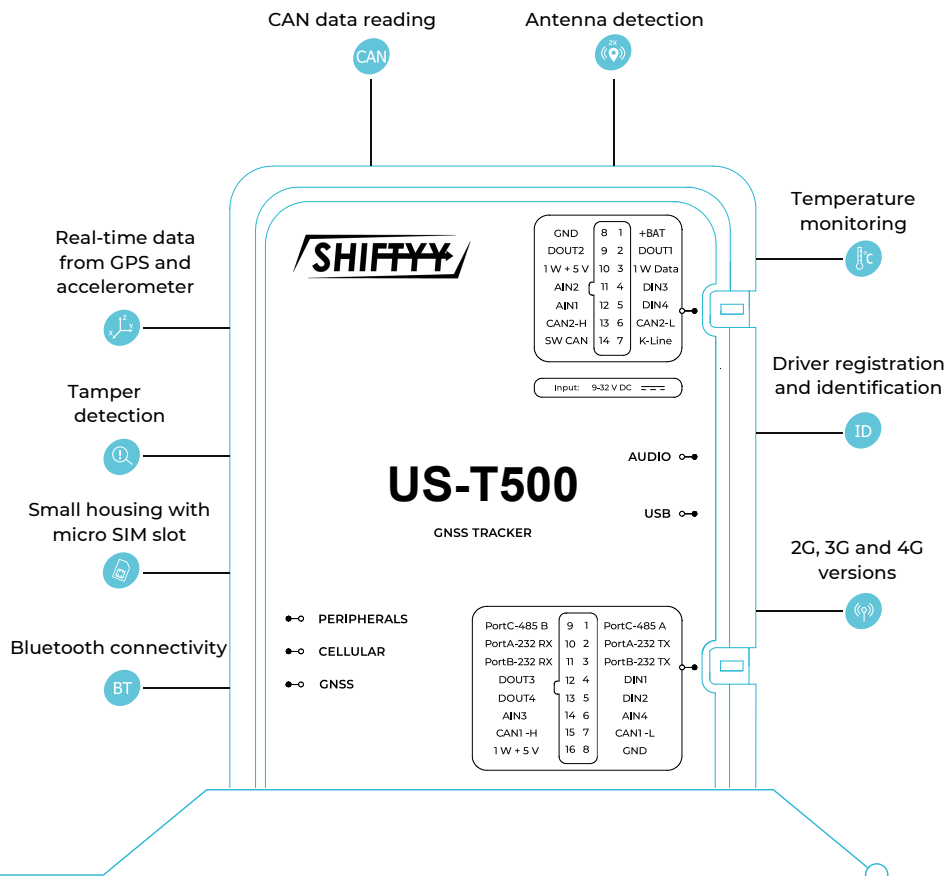

Detailed specifications

Environmental specifications

Temperature	Operating:	-20 to +60 °C
	Storage:	-20 to +45 °C
	Battery charging:	0 to +45 °C
	Battery discharging:	-20 to +60 °C
Relative humidity	5% to 95% Non-condensing	

Electrical specifications

Power supply range	9 – 32 V DC	
Internal battery	LiPo 3.7 V 1050 mAh	
Protections	Battery and a 1-Wire power line short circuit protection Reverse polarity protection Electrostatic discharge protection on USB, SIM card slot and 1-Wire data line Overcurrent protection on a 1-Wire power line and digital outputs Overvoltage protection on analog inputs Charging protection	

Average power consumption @ 12 V DC

Operating (battery charging)	Normal operation (data sending interval ~15 s) :	~160 mA
	Normal operation (constant link enabled):	~155 mA
	Peak value:	~260 mA
Sleep mode	All modules disabled:	~6 mA
	Modem in sleep mode, other modules disabled:	~8 mA
	Modem enabled, other modules disabled:	~9 mA
	GNSS module enabled, other modules disabled:	~22mA

Connectivity

2G option	Modem: Quectel M95 Antenna: Internal Frequency bands @ 2G (GSM): 850/900/1800/1900 MHz
3G option	Modem: Quectel UG96 Antenna: Internal Frequency bands @ 2G (GSM): 850/900/1800/1900 MHz Frequency band @ 3G (UMTS): 800/850/900/1900/2100 MHz
LTE Cat M1/NB-IoT option	Modem: Quectel BG96 Antenna: Internal Frequency bands @ 2G (GSM): 850/900/1800/1900 MHz Bands @ 4G (LTE Cat M1/NB-IoT): B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B25*/B26/B28/B39* * – available upon request
GNSS module	Module: U-blox EVA-M8M Antenna: Internal and external (available as an additional accessory) Positioning systems: GPS, GLONASS, Galileo Augmentation systems: QZSS, SBAS (WAAS, GAGAN, EGNOS, MSAS) Aided start services: AssistNow Online (A-GPS) Tracking sensitivity: -154 to -164 dBm Reacquisition sensitivity: -152 to -160 dBm Cold start duration: < 30 s Aided start: As low as 3 s
Bluetooth module	Module: NRF52832 Bluetooth version: 5.1 Low energy

Detailed specifications

Interfaces

4 x Digital inputs	Voltage range: 0 - 30 V DC Voltage threshold: 4 V DC Voltage threshold when inverted: 250 mV DC
4 x Analog inputs	Voltage range: 0 - 30 V DC Resolution: 12 bit
4 x Digital outputs	Maximum voltage: 32 V DC Maximum current: 1 A @ 25 °C
3 x CAN interfaces	High speed CAN interfaces: 2 Single-Wire CAN interfaces: 1 Light Commercial Vehicle CAN, OBD data reading (including proprietary manufacturer data) 2 interfaces can be used simultaneously (2 x High speed or 1 x High speed + Single-Wire)
K-Line interface	OBD parameter and DTC reading
3 x Serial ports	RS232 ports: 2 (DFS, transparent channel, RFID) RS485 ports: 1 (DFS, transparent channel)
1-Wire interface	Power output: 100 mA @ 4.7 V DC iButton DS1990A, DS1971, up to 4 DS18B20 temperature sensors
User interfaces	Micro USB interface 3 x Indication LEDs 3.5 mm audio interface (not available for the LTE Cat M1/NB-IoT option)

Features

Internal storage	8 MB (max. 39000 records)
External storage	Up to 32 GB (max. 250M records)
Accelerometer	Built-in 3-axis (auto-calibrating, impact detection, motion sensing, tilt detection, g-force up to 4 g)

Certifications and ratings

Certifications	E-mark, CE, FCC, IC, RoHS, WEEE, EAC (in progress)
-----------------------	--

Physical properties

Dimensions	101 x 74 x 23 mm
Weight	128 ± 1 g
Housing	Plastic

Ordering information

US-T500-2G-GL-BT	US-T500 with global 2G and Bluetooth
US-T500-3G-GL-BT	US-T500 with global 3G and Bluetooth
US-T500-LTM-GL-BT	US-T500 with global LTE Cat M1 and Bluetooth